




Extract-All™
An exclusive Air Impurities
Removal Systems, Inc. brand

95% Primary Rigid Cell Filters for Extract-All™ Series E-300 and E-1400

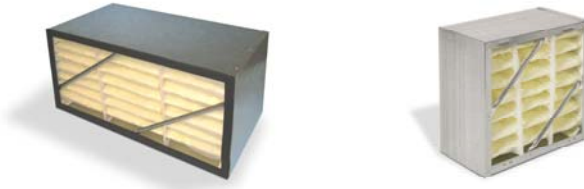

Features:

- Designed for medium and high efficiency applications
- Superior service life
- Total Rigid construction makes it ideal for variable air volume systems where changes in airflow can have an adverse affect on non-rigid type filters
- Fiberglass Media with a special Oil-Mist Lining
- Ideal for High Humidity Applications
- Injection Molded Pleat Separators
- Galvanized Steel Frame
- Box Style
- High Oil-Mist and Coolant Capacity
- Rated to withstand temperatures up to 180 degrees Fahrenheit
- Classified under U.L. std. 900

Efficiency:

90 – 95% efficiency – MERV 14

Typical Applications:

Boring, Chuckers, CNC Machining, EDM Machining, Lathes, Machine Tools, Metal Turing Centers, Milling, Oil Mist & Collar Smoke Removal, Parts Washing, Screw Machines, Wet Grinding

FILTER DEPTH	RATED VELOCITY FPM	INITIAL RESIST. IN. W.G.	FINAL RESIST. IN. WG	MEDIA SQUARE FEET
6"	250	.31	1.50	13.20 – 26.39
12"	500	.59	1.50	29.17 – 58.33

Air Impurities Removal Systems, Inc.
166 North 121st Street, Wauwatosa, Wisconsin 53226-3802
800.236.1889 • Phone 414.257.1770 • Facsimile 414.257.3594
sales@airsystems-inc.com • www.airsystems-inc.com